

BULLDOG WW100B FITTING INSTRUCTIONS FOR WALTER WINTERHOFF WS3000-D/WS3000-H

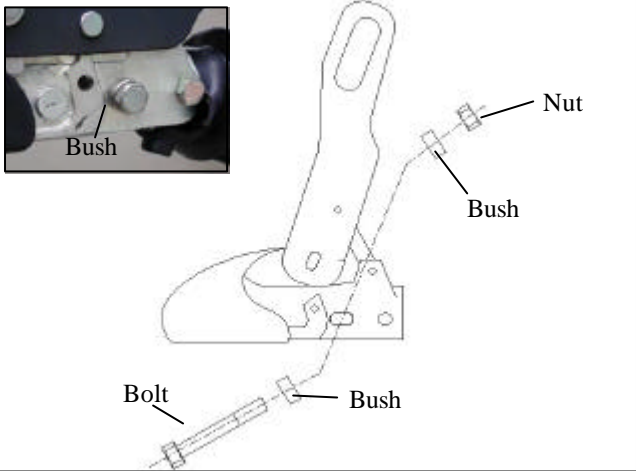


Illustration of front horizontal bolt.

IMPORTANT READ FIRST: In order to fit WW100B Hitchlock the front fixing bolt M12 x 100 (enclosed in this package) needs to be used in place of the standard M12 x 90. A 9mm long bush should be fitted either side of the coupling head. Do not use any other washers on this bolt. Ensure thread protrudes beyond self locking nut. Refer to WS3000 assembly and operating instructions for details of rear bolt assembly. Tightening torque of fixing bolts M12, 10.9:

WS3000-D - 90Nm

WS3000-H - 70Nm

N.B You may find it helpful to have everything close at hand and the lock bolt in the unlocked position separated from the cup, because the Hitchlock needs to be held in place with one hand.

Fitting



1. Lower the hitch handle by inserting the dummy ball into the hitch and pushing firmly upwards.



2. Pass up Hitchlock from beneath the coupling head ensuring front fixing bolt fits inside. Note: A cut out is provided where a rear vertical bolt fixing is used.



3. Place steel shield plate over the handle.

4. Insert the locking bolt through the two holes in the Hitchlock and push cup over end of locking bolt. Turn key ¼ turn clockwise to lock and remove key.

To Unlock: Insert key, rotate ¼ turn anti clockwise and remove cup.



WARNING: Under no circumstances should you use this Hitchlock or any other type of Hitchlock when actually traveling.

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.

Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray outside of lock body with WD40 (or equivalent) minimum every four months.

Key Security. Enter your key number here:

IMPORTANT - Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place**. Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.



**IMPORTANT
READ
THIS FIRST**