


FIXING

INSTALLATION :


Please ensure that the safe is correctly positioned and that the safe is level and flush; this will avoid any "run" of the door and will ensure a correct functioning and longevity of the door opening parts.

- 1- Position the safe in it's definitive place.
 - 2- Ensure that the safe is level by using a spirit level. (use wedges if required)
 - 3- Open the door, and check that there is no run (i.e. that the door is flush)
- If there is any run please review the wedging.

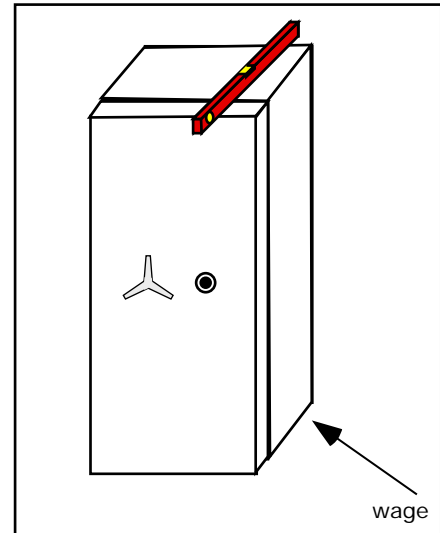

- BASE FIXING

- All DuoGuard models are prepared for base fixing.
- A M12 dynabolt is included with the product.

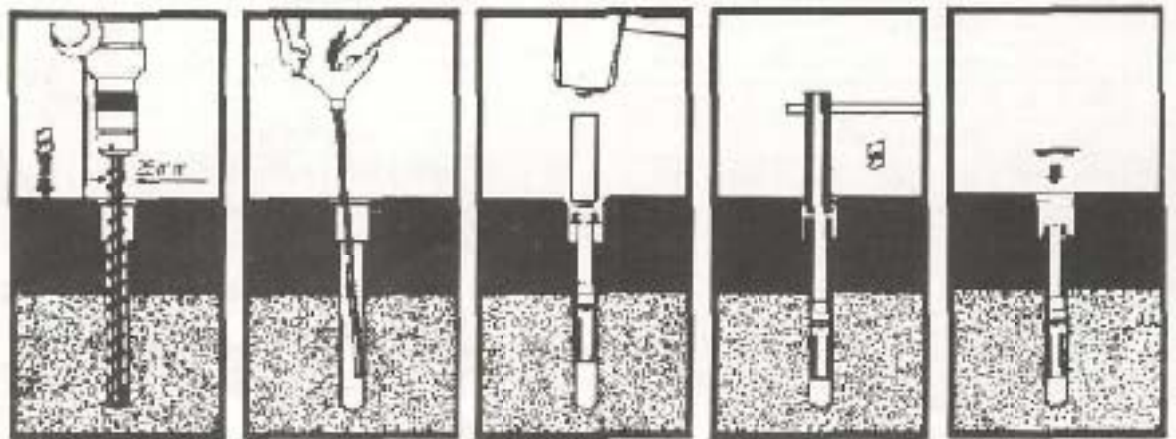

1- Remove the plastic cap and drill a hole in the floor to a minimum depth of 120 mm.

2- Blow to evacuate any dust.

3- Place the expansion bolt in the hole.

4- Tighten the expansion bolt using a torque wrench to 150 NM.

5- Mettre en place le capuchon en plastique.

INSTALLATION OF SHELVES



1- Insert the shelf fixing clips (4 per shelf) according to the height desired.



2- Position the shelf first of all on one side, and then on the other.



3- Check that the shelf is securely positioned before loading any object.