


# Bulldog Eyelock Fitting Instructions

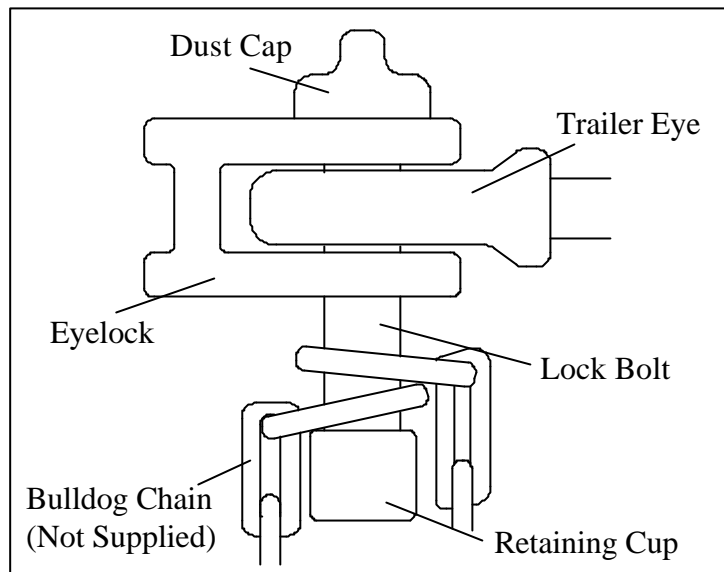

1. To Lock Eyelock.

Remove lock bar, place Eyelock over trailer eye and insert lock bar. Fit retaining cup to lock bar then turn key 1/4 turn clockwise to lock. Fit plastic dust cap over lock bolt head.

2. To Unlock Eyelock.

Remove dust cap, insert key and rotate 1/4 turn anti-clockwise to remove lock bolt, remembering to hold retaining cup, then withdraw the lock bolt.

**NOTE:** The lock bar can be used in conjunction with the Bulldog Chain (not supplied) which can be wrapped around an immovable object to provide an anchor system.

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other  
ity against property to  
evice is fitted.

**Lock Lubrication.**

IMPORTANT - To ensure free movement of the lock, spray outside of lock body with WD40 (or equivalent) minimum every four months.

**Key Security. Enter your key number here:**

IMPORTANT - Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place.** Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.

