

# Bulldog Hitchlock Fitting Instructions




**1. On Caravan Hitchlocks.** Lift left hand rear plastic cover from lock housing.  
**On Commercial Hitchlocks.** Remove red plastic lock protection cap.



**2. To Remove Lock Bolt.** Hold head of bolt with thumb to prevent turning. Push key against springs and turn 1/4 turn anti-clockwise. Pull out lock bolt with key. Place aside carefully. Do not allow dirt to enter lock.



**3. Hitchlock Fitting.** Lift hood, the hitchlock bottom plate is offered up to the hitch and the dummy ring is twisted into the hitch socket.  
N.B. On Albe hitches and new Alko hitches (those fitted with positive location button) it is necessary to lift the handle slightly.

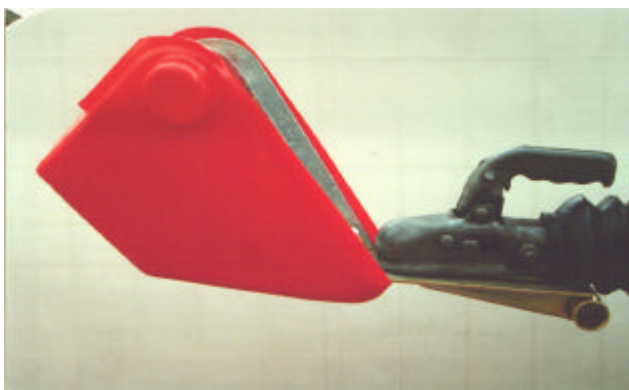

**4. IMPORTANT WARNING. TO ENSURE HITCHLOCK IS FITTED CORRECTLY,** the bottom plate will hang under the hitch and the dummy ring can not be pulled out (without lifting the handle).



**5. Hitchlock Hood.** The hitchlock hood is lowered over the hitch, fully covering the handle and bolts. The lock bolt is inserted and pushed fully home into its hardened steel cup which is permanently retained by the plastic holder on the right hand side. Turn key 1/4 turn clockwise to lock and remove key.

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this this device is fitted.

#### Lock Lubrication.

**IMPORTANT -** To ensure free movement of the lock, spray outside of lock body with WD40 (or equivalent) minimum every four months.

#### Key Security. Enter your key number here:

**IMPORTANT -** Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place**. Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.

