



## HITCHLOCK FITTING INSTRUCTIONS

THE KLAMP-IT HITCH LOCK IS UNIVERSAL & HAS BEEN DESIGNED TO FIT MOST MODERN PRESSED STEEL TYPE HITCHES INCLUDING ALBE & ALKO



YOUR HITCH LOCK IS SUPPLIED WITH TWO FIXING PLATES.


ONE PLATE IS TO SECURE YOUR TRAILER OR CARAVAN IN THE "HITCHED" POSITION. THIS PLATE FEATURES A CUT OUT FOR ATTACHMENT TO THE TOWBALL



THE TYPE SUITABLE FOR THE "UNHITCHED" PLATE IS SUPPLIED WITH A BOLT PRE-FITTED. THIS IS SUITABLE FOR ALKO TYPES OF HITCH BUT SHOULD BE REMOVED WHEN FITTING TO ANY OTHER HITCH TYPES.

## SAFETY WARNING

***VEHICLES MUST NOT BE DRIVEN WITH ANY TYPE OF HITCH LOCK IN PLACE***

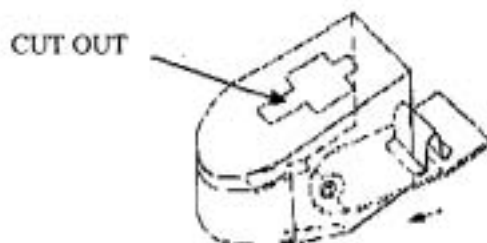

1. INSERT KEY, APPLYING SLIGHT PRESSURE & ROTATE ONE QUARTER TURN, FOR ADDED SECURITY THE KEY CAN ONLY BE REMOVED WHEN IT IS IN THE LOCKED POSITION.

2. SLIDE THE MAIN LOCK HOUSING OVER THE TOP OF THE HITCH, PASSING THE HITCH HANDLE THROUGH THE CUT OUT IN THE LOCK HOUSING (LIFT THE HITCH HANDLE SLIGHTLY IF REQUIRED)

3. SLIDE THE APPROPRIATE LOWER PLATE INTO POSITION WITH THE SHAPED END FORWARD, AS SHOWN ABOVE

4. INSERT THE LOCK PIN INTO THE HOLE IN THE MAIN HOUSING MAKING SURE THAT IT ENGAGES THROUGH THE SLOT IN THE LOWER PLATE & SLIDES FULLY HOME.

5. TURN THE KEY ONE QUARTER OF A TURN TO THE LEFT. YOUR KLAMP-IT HITCH LOCK IS NOW LOCKED.

**MAINTENANCE** : OCCASIONALLY SPRAY WITH LIGHT LUBRICANT (E.G. WD40) TO ENSURE CONTINUED EASE OF OPERATION