

Bulldog Ram Barrier Fitting Instructions

WARNING:

1. For maximum security you are advised to site the post on a concrete or tarmac site - 'NOT ON LOOSE GROUND'.
2. Always remember to replace a ground socket metal cover when the post is removed.
3. Fit protective cap to Lock Bolt to prevent ingress of dirt or water.

Fitting

Note: Check that sockets are a sliding fit on barrier legs before installing.


1. Mark position on ground for two sockets.
2. Excavate two holes to depth of sockets, one must be large enough to accept the ground lock tube as well.
3. Place two ground sockets into the holes and check they are level with each other and the top of the hole.
4. Insert the lock bolt through the eye welded to the post and lock into the ground lock tube ensuring it is the correct way up (1"/25mm clearance hole at the top).

Fit the yellow plastic cap to prevent concrete and dirt damaging the lock.

5. Mix the concrete taking care to make sure the mix is not too wet as a fairly firm mix is essential to support the ground lock casting.

6. Now place the barrier into the two sockets in the holes and check that it is level. Now half fill with concrete around both sockets and tamp down.

7. Continue to fill around the post and ground lock casting ensuring the casting is level with the top of the ground socket and the barrier is level and upright. For safety reasons no ground component should protrude.

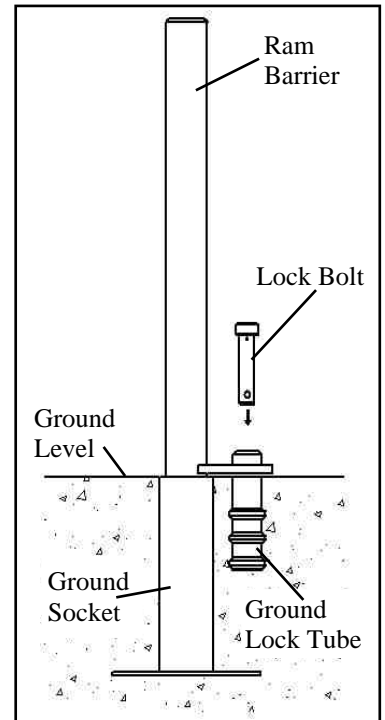

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.

Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray outside of lock body with WD40 (or equivalent) minimum every four months.

Key Security. Enter your key number here:

IMPORTANT - Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place**. Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.



SP18-4

This product is guaranteed for 12 months from the date of purchase. In the unlikely event of a manufacturing fault arising with the product, Bulldog will replace or repair the product free of charge. This guarantee is only valid if the product has been used as directed and a valid proof of purchase is provided. This does not affect your statutory rights.