

# Bulldog SA7L Removable Lock Post Fitting Instructions



This post is intended for use with the Bulldog Minilock.

## WARNING:

1. For maximum security you are advised to site the post on a concrete or tarmacadam site - 'NOT ON LOOSE GROUND'.
2. Always remember to replace a ground socket metal cover when the post is removed.
3. Fit protective cap to Lock Bolt to prevent ingress of dirt or water.

## Fitting

1. Mark position on ground for the socket.
2. Excavate the hole to take socket and ground lock tube.
3. Place the ground socket into the hole and ensure that the socket is level with the top of the hole.
4. Mix the concrete taking care to make sure the mix is not too wet as a fairly firm mix is essential to support the ground lock tube.
5. With the socket in place half fill the hole tamping the concrete around the base.
6. Insert the lock bolt through the eye welded to the post and lock into the ground lock tube. **Fit the yellow plastic cap to prevent concrete and dirt damaging the lock.** Now place the post into the socket, continue to fill around the post and ground tube ensuring the ground tube is level with the top of the ground socket and post is level and upright. For safety reasons no ground components should protrude.
7. When concrete is set, hitch up your caravan or trailer to the post and lock on your Bulldog Minilock.

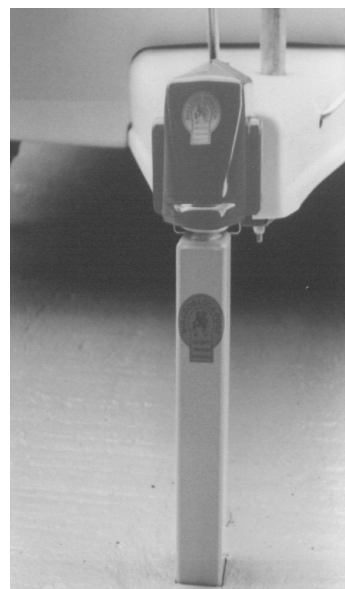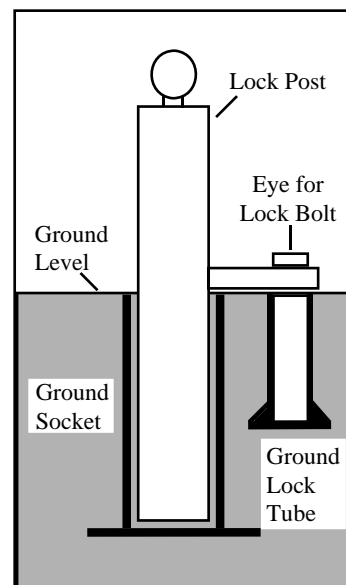

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.

### Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray outside of lock body with WD40 (or equivalent) minimum every four months.

### Key Security. Enter your key number here:

IMPORTANT - Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place.** Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.



SP21-2

This product is guaranteed for 12 months from the date of purchase. In the unlikely event of a manufacturing fault arising with the product, Bulldog will replace or repair the product free of charge. This guarantee is only valid if the product has been used as directed and a valid proof of purchase is provided. This does not affect your statutory rights.